certainteed
SAINT-GOBAIN

Western Canada

Finishing Products

SAINT-GOBAIN

CertainTeed Finishing Products

CertainTeed is a complete system of finishing products, specially developed to meet the demands of drywall professionals. The result is a professional-grade performance that minimizes callbacks and improves profitability.

CertainTeed packages are colour-coded to make it easy to pick the right CertainTeed product for your application.

Ready-Mixed Joint Compounds

CertainTeed Joint Compounds are pre-mixed, high performance products designed for professional applicators. All CertainTeed ready-mixed products are GREENGUARD Gold certified and meet ASTM C475.

CERTAINTEED LITE ALL-PURPOSE

Code: 640018
17 L / 4.5 US Gal.

- Ready-Mixed Joint Compound
- Designed for taping, fill and finish coats
- Low shrinkage

CERTAINTEED LITE ALL-PURPOSE

Code: 639981
18 L / 4.75 US Gal.

- Ready-Mixed Joint Compound
- Designed for taping, fill and finish coats
- Low shrinkage

CERTAINTEED LITE TAPING

Code: 640019
17 L / 4.5 US Gal.

- Ready-Mixed Joint Compound
- For embedding drywall tape and trims
- Excellent adhesion
- Pairs well with CertainTeed NO-COAT corners and the NO-COAT PRO system

CERTAINTEED LITE TAPING

Code: 640016
18 L / 4.75 US Gal.

- Ready-Mixed Joint Compound
- For embedding drywall tape and trims
- Excellent adhesion
- Pairs well with CertainTeed NO-COAT corners and the NO-COAT PRO system

CERTAINTEED LITE FINISHING

Code: 640044
17 L / 4.5 US Gal.

- Ready-Mixed Joint Compound
- Ideal for finish coats
- Low shrinkage
- Very easy to sand

CERTAINTEED LITE FINISHING

Code: 640017
18 L / 4.75 US Gal.

- Ready-Mixed Joint Compound
- Ideal for finish coats
- Low shrinkage
- Very easy to sand

CERTAINTEED LITE TOPPING THE BEST MUD IN THE JOINT®

Code: 640536
17 L / 4.5 US Gal.

- Ready-Mixed Joint Compound
- Ideal for fill and finish coats
- Low shrinkage
- Easy to sand
- Tinted

CERTAINTEED LITE FILL AND FINISH

Code: 648398
17 L / 4.5 US Gal.

- Ready-Mixed Joint Compound
- High performance
- Superior workability
- Minimal shrinkage
- Smooth finish
- Easy to sand

Easi-Fil®

Retail Compounds

Easi-Fil® All-Purpose Drywall Compounds are pre-mixed, air drying, easy-to-use products for any drywall job. Use them to embed paper tape, conceal and finish joints, fasteners and trim accessories. Easi-Fil compounds come in varying sizes for any job and are GREENGUARD Gold certified.

CERTAINTEED EASI-FIL® ALL-PURPOSE

Code: 639974 – 2 L / 0.5 US Gal.
Code: 639976 – 4.5 L / 1.19 US Gal.
Code: 639978 – 12 L / 3.17 US Gal.

- Ready-Mixed Drywall Compound
- Embedding paper tape
- General purpose formula for filling, repairing, and finishing drywall joints, trims and fasteners

CERTAINTEED EASI-FIL® DUST AWAY®

Code: 639995 – 2 L / 0.5 US Gal.
Code: 639991 – 4.5 L / 1.19 US Gal.
Code: 639989 – 12 L / 3.17 US Gal.

- Ready-Mixed Drywall Compound
- When sanded, dust clumps and falls directly to the floor
- General purpose formula for filling, repairing and finishing drywall joints, trims and fasteners
- Ideal for areas where cleanliness is required

Easi-Fil Setting Powders are chemically setting compounds that set in a prescribed time for fast fills and repairs. They have a higher bond strength than air drying compound. All Easi-Fil Setting Powders are GREENGUARD Gold certified.

CERTAINTEED EASI-FIL® LIGHT REPAIR 20

Code: 640048
1.25 kg / 2.76 lb

- Setting Compound
- Embedding mesh tape
- Filling and finishing drywall joints, trims and fasteners
- Easy to sand
- Sets in 20 minutes

CERTAINTEED EASI-FIL® LIGHT REPAIR 90

Code: 640049
1.25 kg / 2.76 lb

- Setting Compound
- Embedding mesh tape
- Filling and finishing drywall joints, trims and fasteners
- Easy to sand
- Sets in 90 minutes

CERTAINTEED EASI-FIL® HEAVY REPAIR 90

Code: 640050
2 kg / 4.4 lb

- Setting Compound
- Heavy fills and repairs
- Embedding mesh tape prior to finishing coat
- Hard to sand
- Sets in 90 minutes

* CertainTeed Lite Topping THE BEST MUD IN THE JOINT® does not meet ASTM C475

Sandable Setting Powders

CertainTeed LITE Sand PLUS Setting Compounds are lightweight sandable chemically setting powders used to prefill joints, embed joint tape and conceal joints, fasteners and trim accessories on drywall panels. They can also be used for interior patching and repair. They are ideal for heavy fills because they are specially formulated to harden with very little shrinkage in a prescribed time frame. Setting times are available from 20 minutes to 90 minutes.

CERTAINTEED LITE SAND PLUS
LITE SAND PLUS 20 Code: 640780
LITE SAND PLUS 45 Code: 640781
LITE SAND PLUS 90 Code: 640782
8.1 kg / 18 lb

- Setting Compound
- Excellent adhesion: ideal for new construction and repair jobs
- Easy to mix and spread
- Low shrinkage
- Sandable

CERTAINTEED M2TECH® 90
Code: 640902
8.1 kg / 18 lb

- Setting Compound
- M2Tech Technology for moisture and mould resistance
- Lightweight
- Chemical hardening
- Low shrinkage
- Sandable when dry

High Strength Setting Compound

CertainTeed High Density Setting Compound 90 is recommended for heavy fills or when exceptional bond is necessary. Once dry the product is not easily sanded. It is specially formulated to harden with very little shrinkage. Setting time is 90 minutes.

CERTAINTEED HIGH DENSITY 90
Code: 640014
15 kg / 33 lb

- High Strength Setting Compound
- Hard to sand
- Low shrinkage
- Use for embedding tape, heavy fills and repairs
- Exceptional strength

Joint Reinforcement Tape

CertainTeed Marco® Spark-Perf® Joint Reinforcement Tape is a spark perforated paper tape designed for use with ready-mix joint compound to reinforce drywall joints and corners.

CERTAINTEED MARCO® SPARK-PERF® PAPER TAPE
Code: 642466 – 500′ x 10 rolls
Code: 642461 – 250′ x 20 rolls
Code: 642465 – 75′ x 20 rolls

- Spark-perforated for elimination of air bubbles
- Manufactured from fibred-paper with added tensile strength to help prevent tearing, wrinkling or stretching
- Machine roughed for superior bonding

FIBAFUSE® PAPERLESS DRYWALL TAPE
Code: 406479
2-1/16″ x 250′

- Compatible with mould resistant drywall
- Stronger than paper tape
- Perfect "10" rating on ASTM D3273 mould test
- For use with setting compounds

Wall and Ceiling Spray Textures

CertainTeed Wall and Ceiling Spray Textures provide a decorative appearance over drywall panels and most other interior wall and ceiling surfaces. They are formulated to provide for a variety of decorative options including splatter, knockdown and orange peel designs.

CERTAINTEED MEDIUM-TEX SPRAY TEXTURE

Code: 640026
15 kg / 33 lb

- Perlite aggregate based
- Bright white medium texture finish
- Good hide

CERTAINTEED COARSE-TEX SPRAY TEXTURE

Code: 640036
15 kg / 33 lb

- Polystyrene aggregate based
- Bright white coarse texture finish
- Good hide

CERTAINTEED SPANISH-TEX SPRAY TEXTURE

Code: 640039
10 kg / 22 lb

- Dust free pre-mixed product
- Harder and more durable finish
- Suitable for all spray patterns and equipment

CERTAINTEED SPRAY-LITE READY-MIXED TEXTURE

Code: 640045
17 L / 4.5 US Gal.

- Dust free pre-mixed product
- Suitable for both hand and machine applications

Coatings

CertainTeed coatings are high performance surfacers that efficiently bring high levels of finishing.

CERTAINTEED LEVEL V PRIMER / SURFACER

Code: 405374
18.9 L / 5 US Gal.

- Primer/surfacer for walls and ceilings
- Takes a level 4 finish to level 5 finish
- Designed for easy roller or spray application
- Eliminates putty or skim coating by hand
- Can be sanded but not necessary

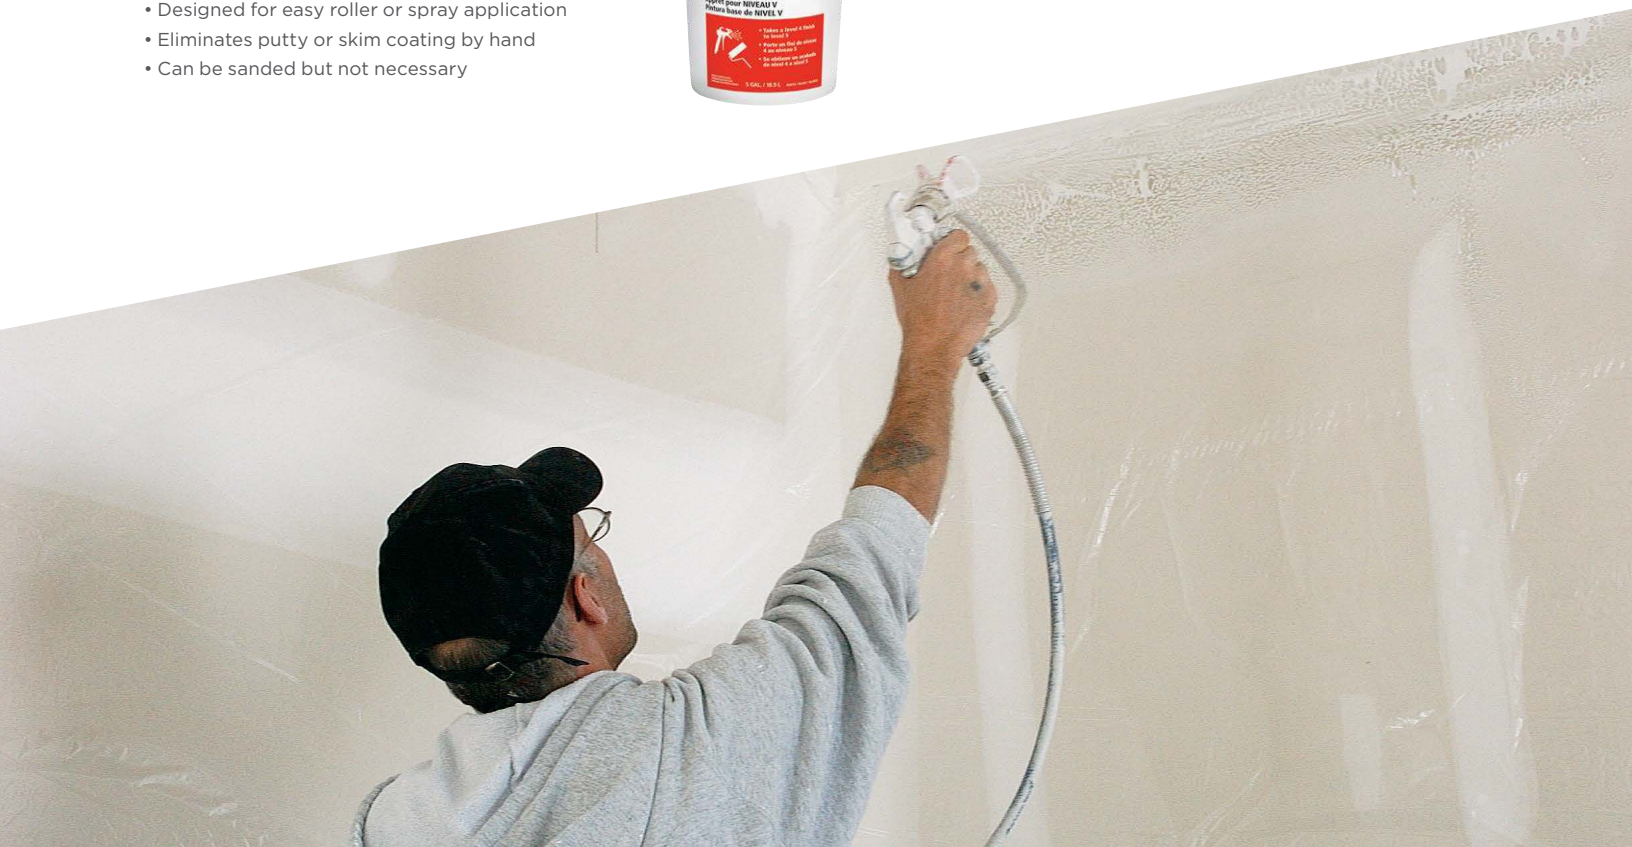

NO-COAT® Structural Laminate Drywall Corner System

GREENGUARD
PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL.COM/GG UL 2818
GOLD

The NO-COAT® Structural Laminate (SLAM®) design represents a revolutionary drywall corner system that provides superior strength and durability, installs faster, and delivers bottom line savings in labour.

Made With SLAM TECHNOLOGY®

Flexible Drywall Corners

Mud applied NO-COAT flex roll products are ideal for off-angle applications, both short and long runs. Wide flange covers large gaps and poor framing. Built-in flexible hinge fits any inside or outside corner angle and creates crisp, straight lines. They won't blister, bubble, dent or crack and the surface paper is ideal for applying paint or texture.

CERTAINTEED NO-COAT® FLEXIBLE CORNER 325

Code: 639586

100′ x 3-1/4″ – 10 rolls per case

NO-COAT Flexible Corner 325 offers the same durability and strength as Flexible Corner 450, with a narrower flange width that makes it ideal for shorter off-angle spans.

- Finishes short run off-angles of any length with straight, precise lines
- Built-in flexible hinge forms to any inside or outside corner angle
- Flange width hides irregular framing
- SLAM corner design ensures strength, durability, labour savings and eliminates costly callbacks

CERTAINTEED NO-COAT® FLEXIBLE CORNER 450

Code: 639585

100′ x 4-1/2″ – 4 rolls per case

The world's #1 flex product has earned the reputation for delivering perfectly straight lines for challenging off-angles and long spans, while withstanding settling, shrinking lumber, seismic movements and temperature variations.

- Extra stiff profile provides easy application for long spans
- Wide flange covers large gaps and poor framing
- Built-in flexible hinge adjusts to fit any inside or outside corner angle
- SLAM corner design ensures strength, durability, labour savings and eliminates costly callbacks

CERTAINTEED NO-COAT® PRO CORNER

Code: 647203

250′ x 3 3/4″

NO-COAT PRO Corner flexible roll product is ideal for production work, long columns and soffits. Designed to work exclusively with the NO-COAT PRO machine.

- Tapered high strength copolymer core withstands severe impacts. Won't rust. Requires less mud.
- Joint tape permanently bonds corner to drywall with all purpose mud.
- Formulated surface paper eliminates cracks, chips and peels, resists abrasion, and accepts any finish.

CERTAINTEED NO-COAT® PRO MACHINE

Code: 405331

The NO-COAT PRO machine is the first and only automated system for custom cutting corners of any length or angle. Its lightweight portability makes it easy for setup.

- NO-COAT PRO is designed to be used with NO-COAT PRO CORNER
- Portable size is light-weight and easy to maneuver
- Replaces pre-cut sticks and roll products with one simple 250′ (76.2 m) roll
- Reduces waste on site
- Easy-to-use keypad simplifies operation and stores custom measurements

NO-COAT® Structural Laminate Drywall Corner System

GREENGUARD
PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818
GOLD

NO-COAT® corners abandon corner bead design entirely. Instead, the SLAM design integrates materials like dimensionally extruded copolymer plastic and formulated saturated paper. The result is a corner system that outperforms all others in the market.

Drywall Corner Sticks

Optimal strength and performance for the toughest, straightest edge! NO-COAT mud applied, easy-to-install stick lengths, deliver perfect corners in record time. Won't blister, bubble or edge crack. Apply with CertainTeed tools for high speed installations and flawless results.

CERTAINTEED NO-COAT® OUTSIDE 90

Code: 640665 – 8′
Code: 640666 – 9′
Code: 640667 – 10′
Code: 640668 – 12′

CERTAINTEED NO-COAT® INSIDE 90

Code: 640661 – 8′
Code: 640662 – 9′
Code: 640663 – 10′

CERTAINTEED NO-COAT® BULLNOSE

Bullnose 3/8″
Code: 639613 – 8′
Code: 639614 – 9′
Code: 639615 – 10′
Code: 640669 – 12′

Bullnose 3/4″
Code: 640657 – 8′
Code: 640658 – 9′
Code: 640659 – 10′
Code: 640660 – 12′

CERTAINTEED NO-COAT® L-TRIM

L-Trim 1/2″
Code: 640670 – 10′

L-Trim 5/8″
Code: 640671 – 10′

CERTAINTEED NO-COAT® ARCH

Arch Bullnose 3/4″
Code: 639612 – 10′

Arch Outside 90°
Code: 640655 – 10′

Note: some products may be available by special order only

Easy-to-apply, high performance, drywall corner solutions that outperform all others in the market.

LEVELLINE®

GREENGUARD
PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818
GOLD

Flexible Drywall Corners

Mud applied LEVELLINE® flexible rolls are ideal for off-angle applications, both short and long runs. Wide flange covers large gaps and poor framing. The built-in flexible hinge fits any inside or outside corner angle and creates crisp, straight lines.

CERTAINTEED LEVELLINE® FLEXIBLE ROLLS
Code: 640656
100′ x 2-3/4″ – 12 roll case

- Finishes short runs and off-angles—of less than 10′ — with straight, precise lines
- Built-in flexible hinge forms to any inside or outside corner angle
- Flange width hides irregular framing

LEVELLINE flexible corner flexes to any inside or outside corner angle, making finishing fast and easy. Narrower flange width is ideal for shorter off-angle spans.

AquaBead®

Water-Activated Drywall Corner

Water-activated AquaBead® offers fast, easy installation and outstanding performance, every time. CertainTeed AquaBead corner products are quick and easy — just spray with water and press. No messy compound or spray adhesive required. They can be coated within 30 minutes for quicker finishing. Robust paper-polymer-paper design withstands impacts and movement to prevent dents and edge cracking.

CERTAINTEED AQUABEAD® OUTSIDE 90
Code: 639662 – 8′
Code: 639661 – 9′
Code: 639663 – 10′

Code: 639717 – 12′

CERTAINTEED AQUABEAD® BULLNOSE
Code: 639666 – 8′
Code: 639665 – 9′
Code: 639660 – 10′

CERTAINTEED AQUABEAD® L-TRIM
L-Trim 1/2″
Code: 639664 – 10′
L-Trim 5/8″
Code: 639872 – 10′

Note: some products may be available by special order only

- Water activated adhesive
- Simple to apply
- Superior bonding
- No nails, compound or spray glue required
- Easy to cut
- Won’t rust or crack
- Lightweight for easy handling
- Impact resistant

Just Add Water

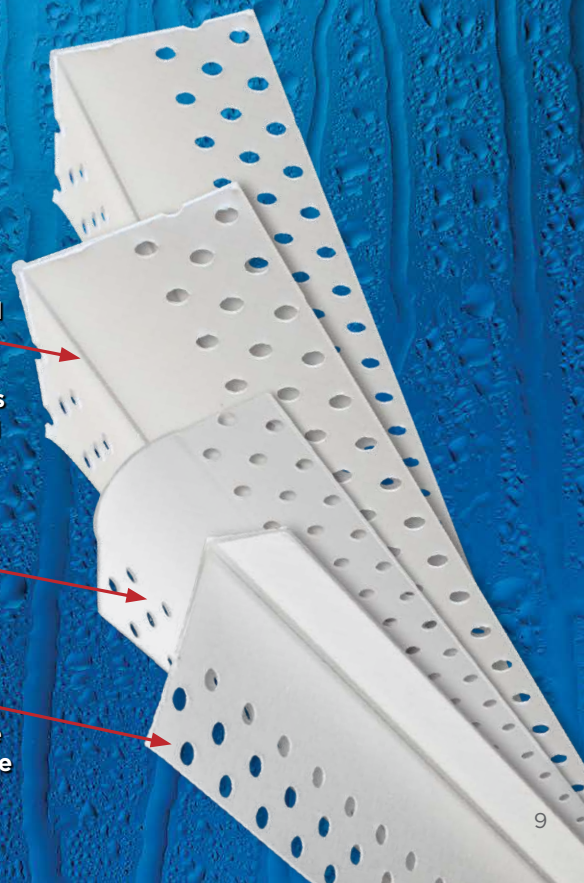

Specially engineered nose does not require coating. Just fill the outside edges with joint compound to create the perfect corner.

Water-activated adhesive provides a superior bond directly to drywall

Perforations allow compound to adhere to the drywall surface

Drywall Corner Tools

CERTAINTEED NO-COAT® ROLLERS

CertainTeed rollers press corners firmly and accurately into place, creating an absolute bond to the drywall. Drywall corner installations are faster and easier, delivering bottom-line savings on labour and mud.

- Ensures high speed, accurate installations
- Squeezes out excess mud
- Taper matches exact corner profile for the maximum bond with the minimum amount of mud
- Highly durable. Stainless steel components provide extreme corrosion resistance
- Stainless steel rollers with Nylatron and brass bushings
- Stainless steel frame and hardware

OUTSIDE 90°
Code: 640677

INSIDE 90°
Code: 640679

BULLNOSE
Code: 639616

ONE SIDED
Code: 640678

CERTAINTEED NO-COAT™ PRO ROLLER

- Larger wheels for a better 90 degree corner
- Durable thermoplastic roller wheels
- Stainless steel frame and hardware
- Corrosion resistant

NO-COAT® PRO
Code : 640675

CERTAINTEED AQUABEAD® ROLLERS

CertainTeed AquaBead Rollers allow for high speed installations and flawless results

- Ensures high speed, accurate installations
- Squeezes out excess mud
- Taper matches exact corner profile for the maximum bond with the minimum amount of mud
- Highly durable.

OUTSIDE 90°
Code: 405325

BULLNOSE
Code: 405326

CERTAINTEED DOUBLE BARREL HOPPER™

Works with inside, outside and bullnose stick corners and flexible corners.

Code: 640676

- Eliminates part changes or reconfigurations
- Ensures a uniform, high-speed installation
- Single piece gates with ergonomic hand knob allow for fast and easy adjustments
- High density polyurethane tank and gate controllers
- Stainless steel reservoir trough and gates

CERTAINTEED NO-COAT® PRO HOPPER

The NO-COAT PRO hopper can be used separately from the NO-COAT PRO machine to apply joint compound to other corner products. Works with inside, outside and L-Trim stick corners and flexible corners.

Code: 405329

- 5 gallon (19 L) hopper is easy-to-fill, clean and cap for overnight mud storage
- Extension arms to stand on a regular pail
- Eliminates part changes or reconfigurations
- Ensures a uniform, high-speed installation
- Single piece gates with ergonomic hand knob allow for fast and easy adjustments
- High density polyurethane tank and gate controllers
- Stainless steel reservoir trough and gates

CertainTeed rollers press corners firmly and accurately into place, creating an absolute bond to the drywall. Ensures high speed, accurate installations, and delivers bottom-line savings on labour and mud.

Technical Information

TECHNICAL REFERENCES

For additional information on the application and finishing of CertainTeed Joint Compounds please consult:

- ASTM C475: Standard specification for Joint Compound and Joint Tape for Finishing Gypsum Board.
- ASTM C840: Standard Specification for Application and Finishing of Gypsum Board.
- GA-214: Gypsum Association publication "Levels of Gypsum Board Finish."
- GA-216: Gypsum Association publication "Recommended Specifications for the Application and Finishing of Gypsum Board."

SITE CONDITIONS

The room temperature should be maintained at 10°C (50°F) for 48 hours prior to application and continuously thereafter until completely dry. Drywall should be dry for at least 48 hours before the application of joint compounds. Continuous ventilation must be provided to ensure proper drying. When using temporary heating, care should be taken to avoid overheating and high humidity.

WARRANTY

Since methods and conditions of application such as temperature, humidity and over thinning are beyond our control, CertainTeed Canada, Inc. (CertainTeed) will not be responsible for the failure of this Product when the Product is not used according to directions and specifications and accepted standards of procedure inherent in drywall application; or when reasonable allowance is not made by the user for adverse weather and job conditions. For product warranty information visit **certainteed.ca/warranty** or call 1-800-233-8990

certainteed
SAINT-GOBAIN

Our full range of reliable building solutions makes installations faster and simpler. Learn more at certainteed.ca/drywall or call 800-233-8990.

USGBC® and the related logo are trademarks owned by the U.S. Green Building Council® and are used with permission.

USGBC MEMBER

CANADA GREEN BUILDING COUNCIL • CONSEIL DU BÂTIMENT DURABLE DU CANADA • MEMBER

The Health Product Declaration® logo is a trademark or service mark of Health Product Declaration Collaborative, Inc., in the United States and in other countries and is being used herein under license.

VERIFIED hpd VERSION 2.1.1

GREENGUARD
PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818
GOLD

SAINT-GOBAIN

CertainTeed Canada

CEILINGS • GYPSUM • INSULATION • ROOFING • SIDING • TRIM

2424 Lakeshore Rd. West, Mississauga, ON L5J 1K4 800-233-8990 certainteed.ca

© 06/24 CertainTeed Canada, Inc. 08-00-917-CA-EN